


# 2N® Helios IP Mobile v.3 - How to call over a SIP proxy?


2N® Helios IP Mobile application version 3 or higher can be registered to any SIP proxy as a regular SIP client.

First you need to run the 2N® Helios IP Mobile application:

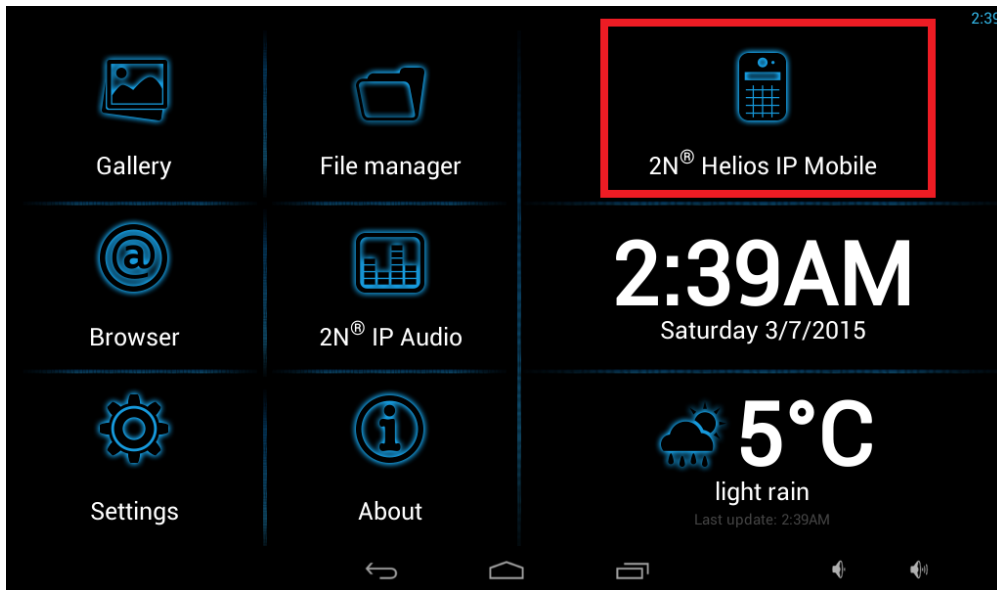

And proceed following configuration steps:

1. Open the configuration menu of 2N® Helios IP Mobile application:

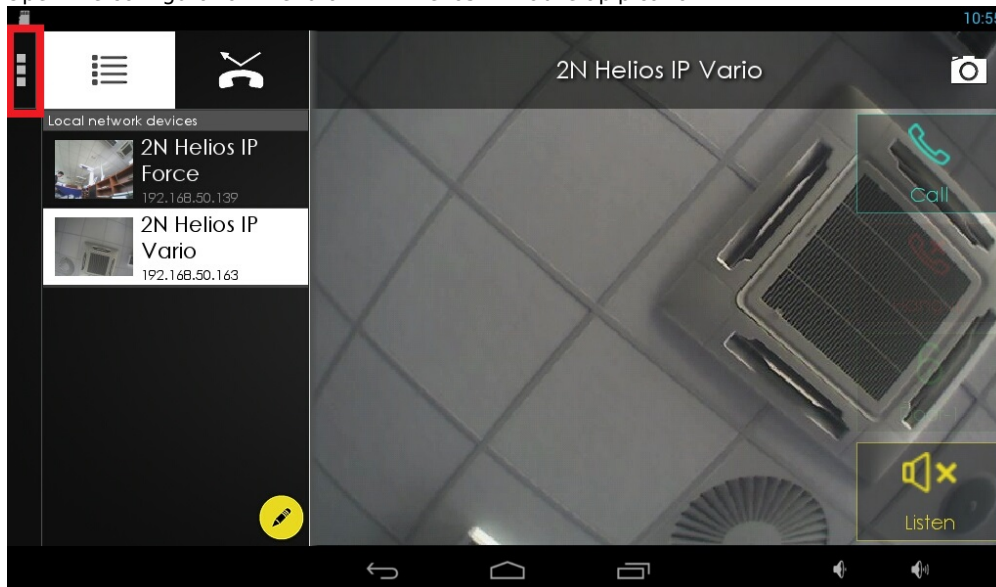


2. Enable the SIP proxy client by clicking on SIP Proxy - ON:



- The proxy configuration details will automatically pop-up during the 1st setup. Later on you can view them by clicking on the SIP proxy settings button.  
Enter please all necessary details such as the User name, password, SIP proxy address etc.:



- Once you configure the SIP proxy connection, you will see the proxy status Connected and the keypad for dialling will also appear:

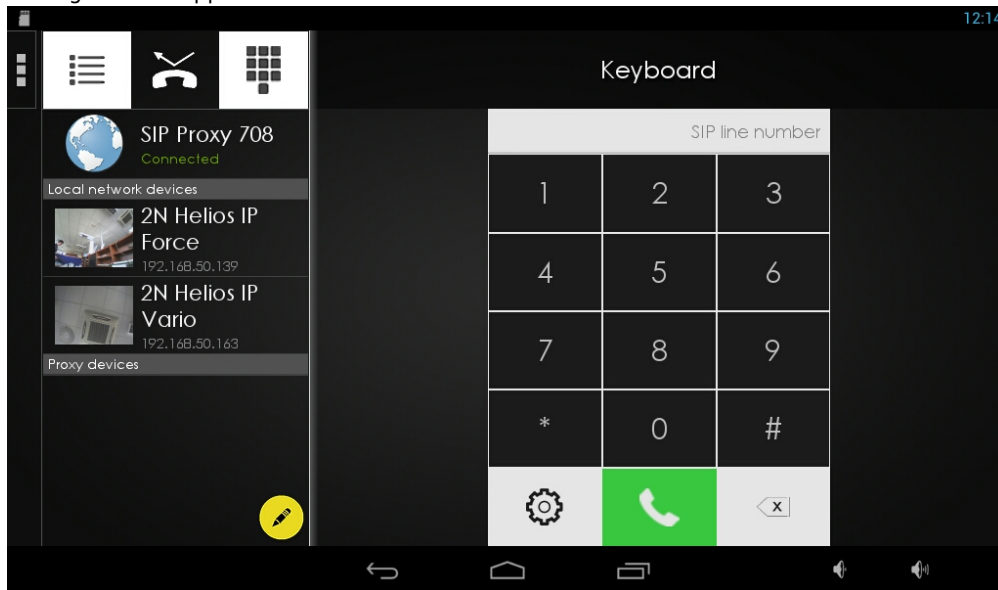

Alternatively you can also add some proxy devices to the device list on the left, to call them instantly without the keypad.