

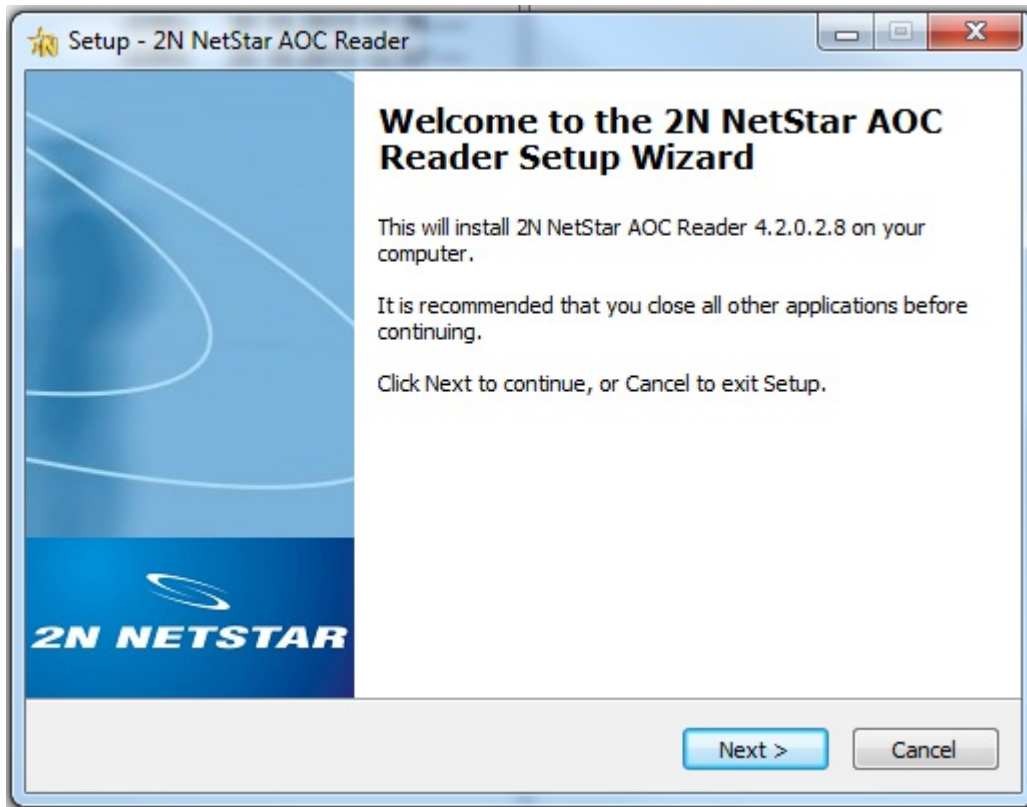



AoC reader installation - How to install it with 2N® NetStar

1) Start the installation of the AoC reader by double click on setup icon (NsAocRSetup_version.exe) and you will reach the Setup Wizard. After this set a few basic parameters as you can see in this short presentation. Make sure that your version is compatible (the same) as in your Netstar

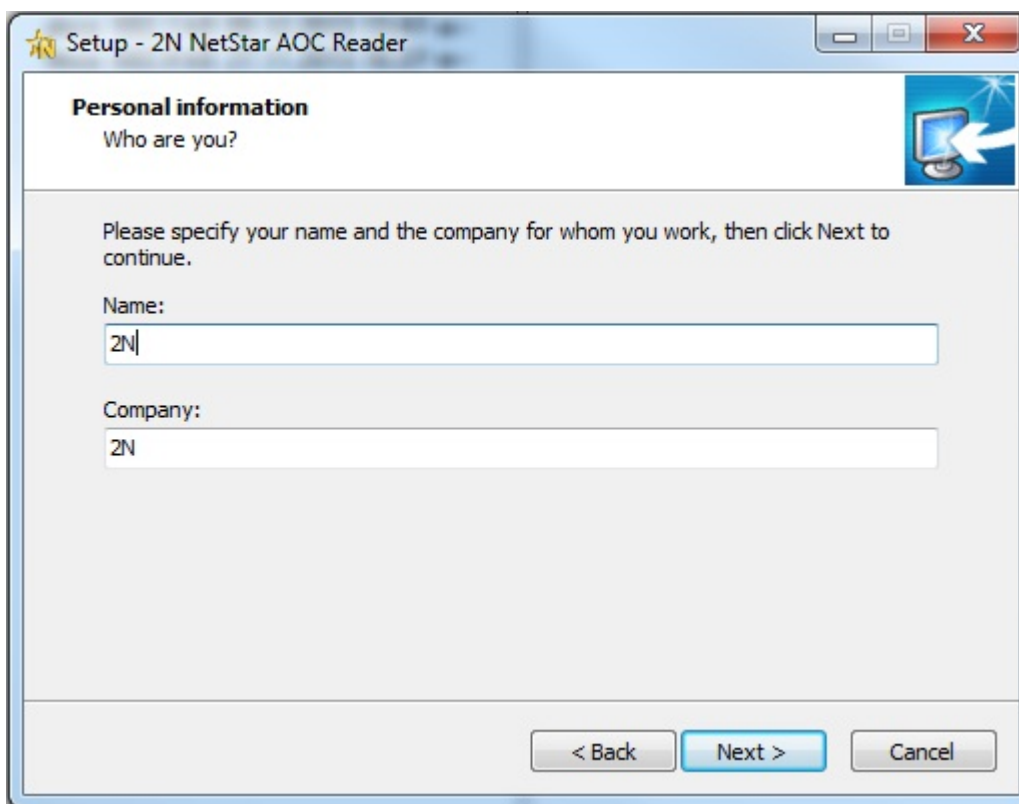

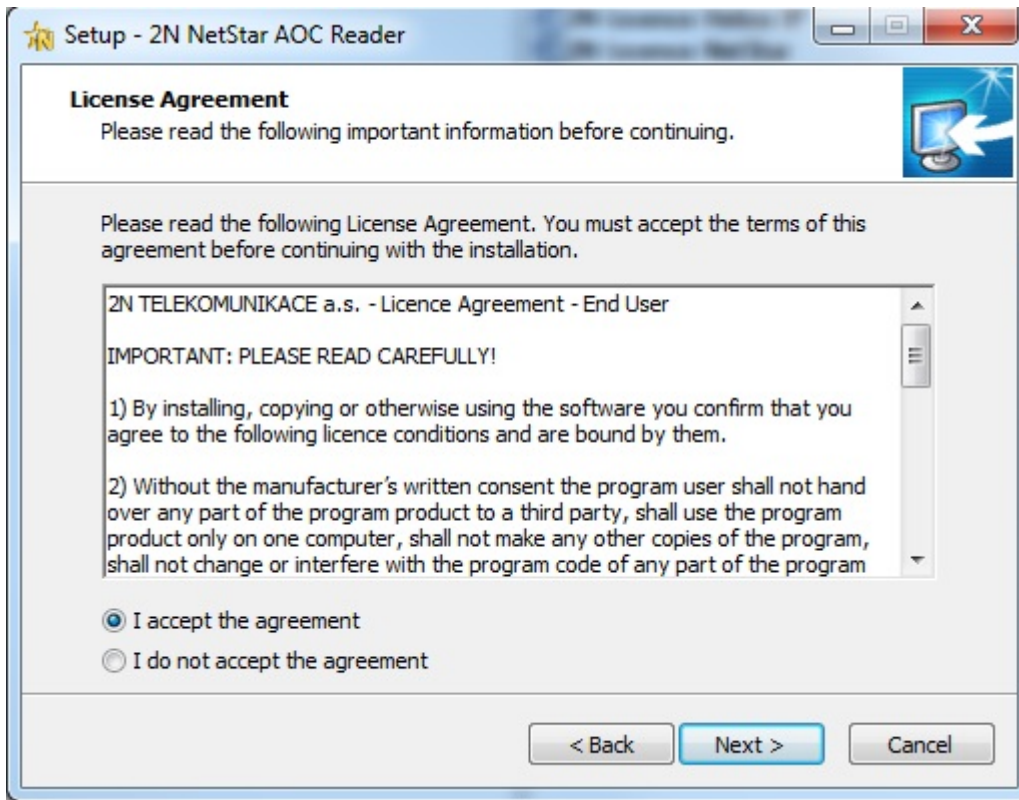

Set up the IP address and login name and password for you Netstar CPU

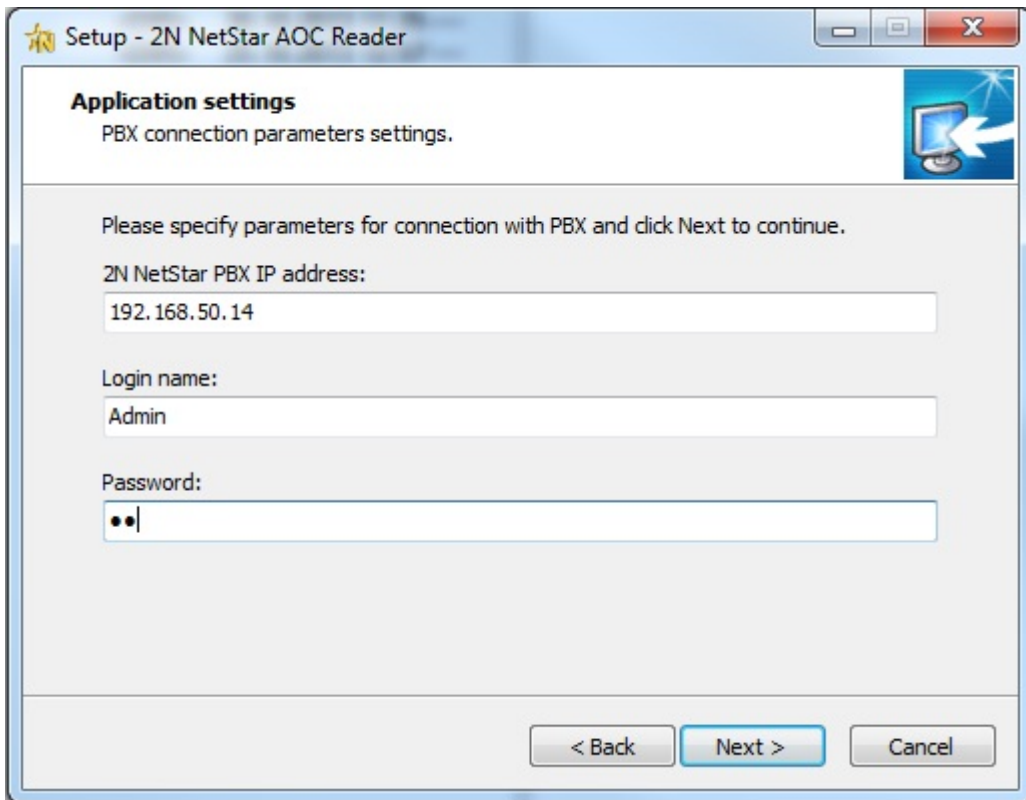

Setup - 2N NetStar AOC Reader

Application settings
PBX connection parameters settings.


Please specify parameters for connection with PBX and click Next to continue.

2N NetStar PBX IP address:

Login name:

Password:

< Back Next > Cancel

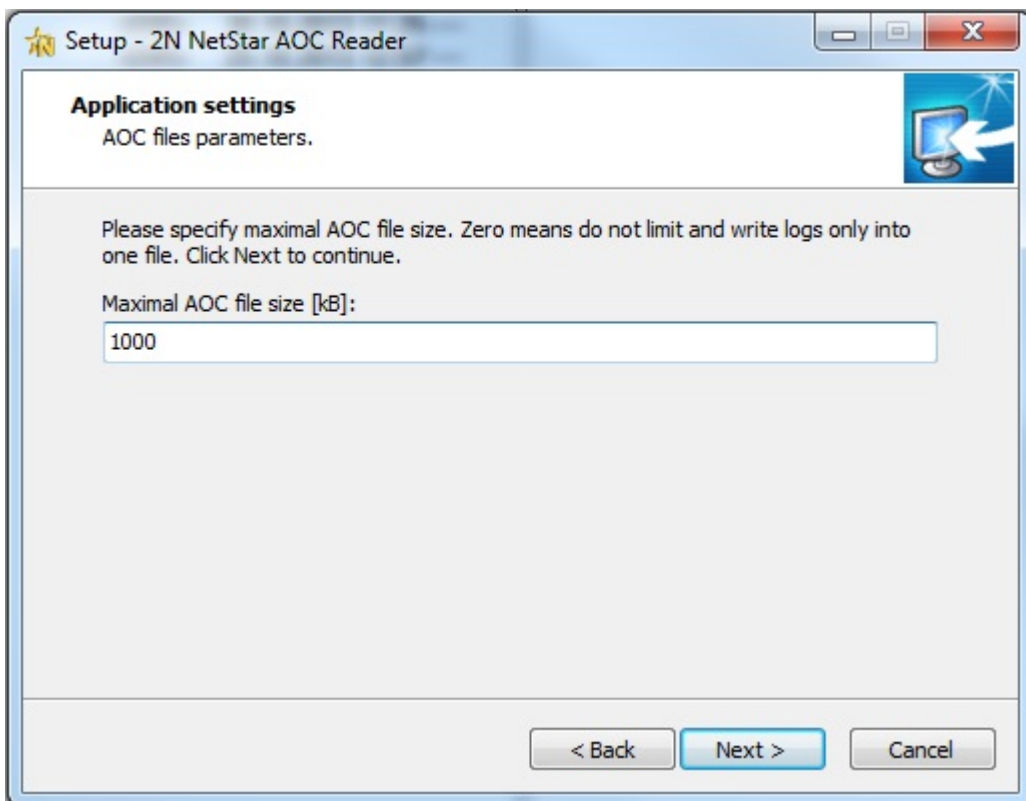

Setup - 2N NetStar AOC Reader


Application settings
AOC files parameters.

Please specify maximal AOC file size. Zero means do not limit and write logs only into one file. Click Next to continue.


Maximal AOC file size [kB]:

< Back Next > Cancel



Select the destination for AoC files (txt format)

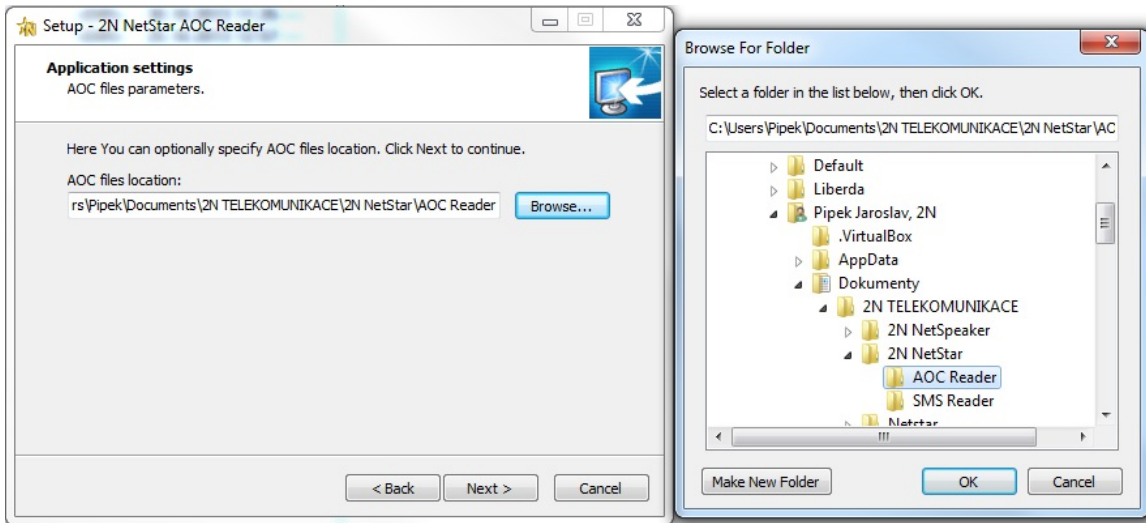


Select a folder where would you like to install program AoC reader

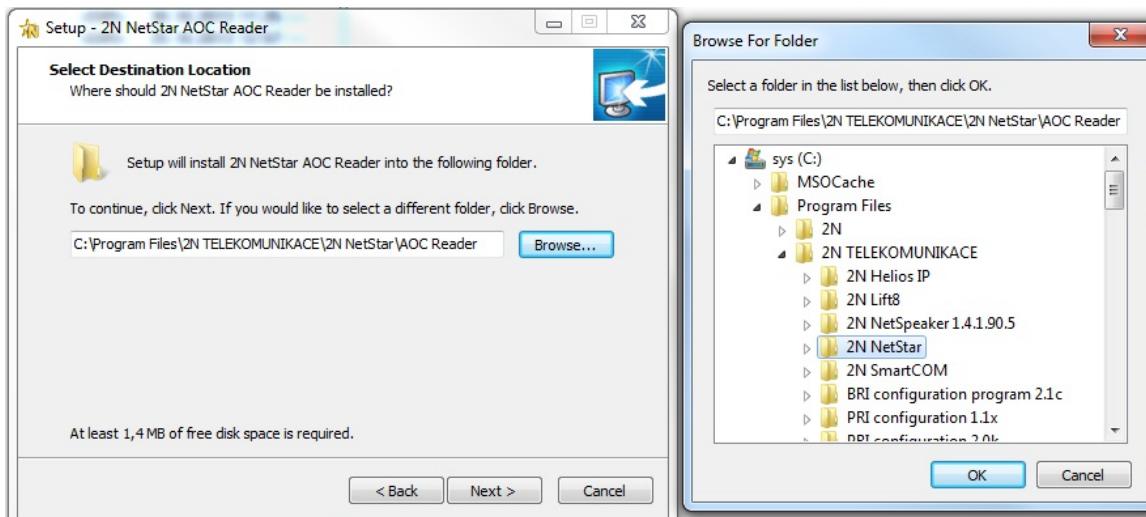

After you start the program (nsAocR.exe), you will be able to captured the AoC records from your Netstar.

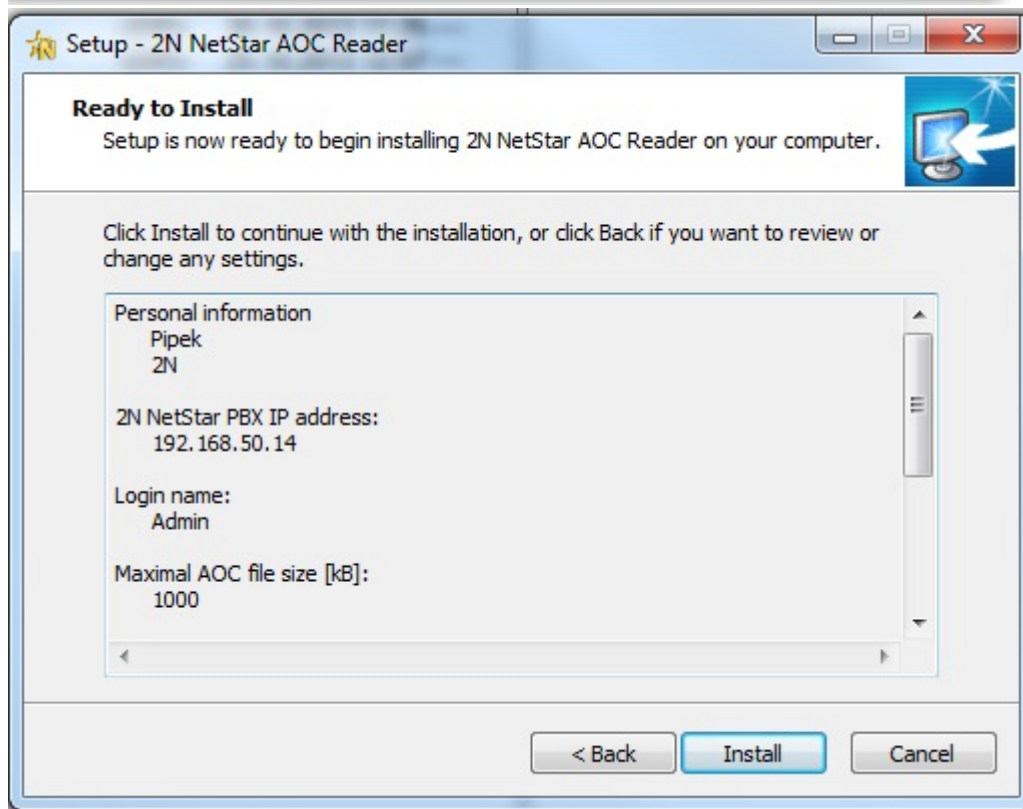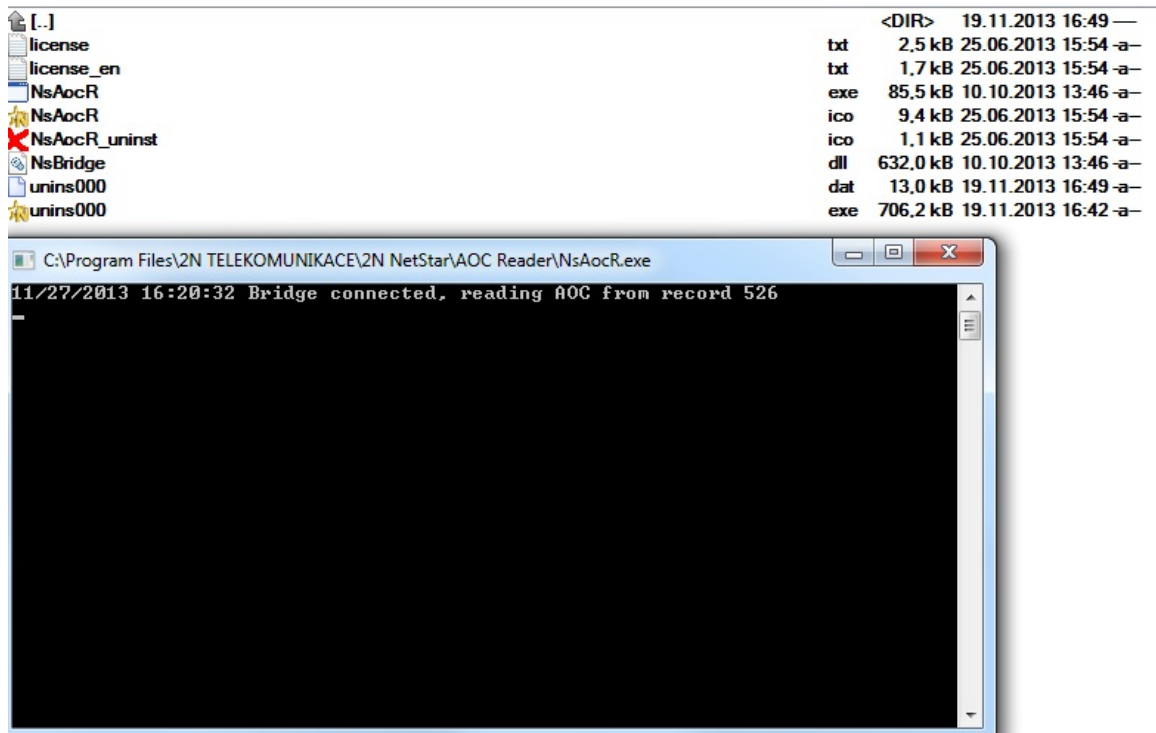

You can find the captured data in txt format, here is an example

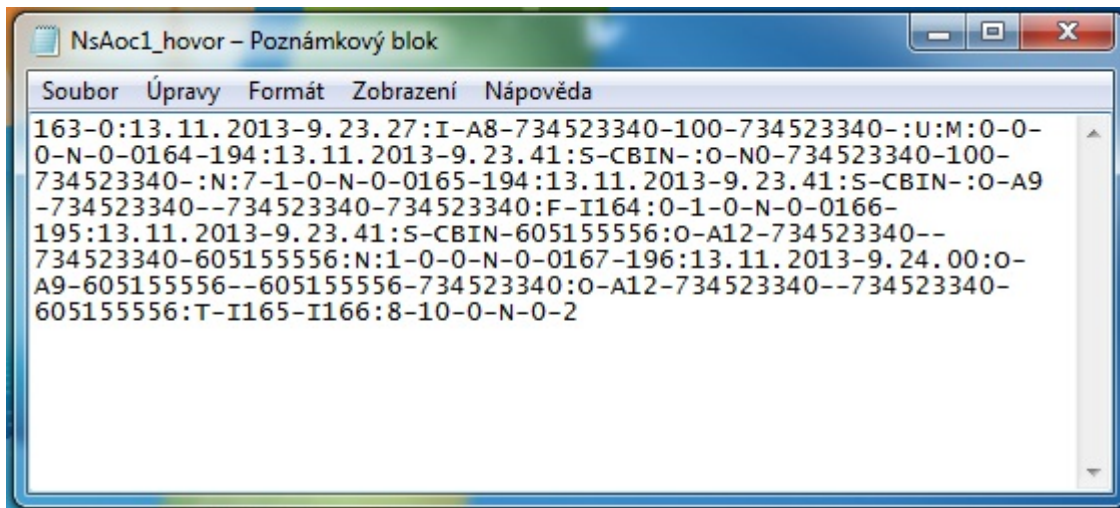

```
Soubor Úpravy Formát Zobrazení Nápověda
163-0:13.11.2013-9.23.27:I-A8-734523340-100-734523340-:U:M:0-0-
0-N-0-0164-194:13.11.2013-9.23.41:S-CBIN-:O-N0-734523340-100-
734523340-:N:7-1-0-N-0-0165-194:13.11.2013-9.23.41:S-CBIN-:O-A9
-734523340--734523340-734523340:F-I164:0-1-0-N-0-0166-
195:13.11.2013-9.23.41:S-CBIN-605155556:O-A12-734523340--
734523340-605155556:N:1-0-0-N-0-0167-196:13.11.2013-9.24.00:O-
A9-605155556--605155556-734523340:O-A12-734523340--734523340-
605155556:T-I165-I166:8-10-0-N-0-2
```

More product information:

[2N® NetStar IP \(Official Website 2N\)](#)

[2N® NetStar \(Official Website 2N\)](#)

Manuals:

[Product support for 2N® NetStar \(wiki.2n.cz\)](#)