

SIP registration - How to register 2N® Lift8 to 2N® OfficeRoute




Info

This FAQ briefly describes how to register 2N® Lift8 with 2N® OfficeRoute. In a few steps you will learn how to configure both devices. Every step contains screen from web interface and brief description of configuration.

Configuration of 2N® Lift8

1. Open Lift8 tool and go to section Configuration->Parameters->VoIP Settings. Fill in IP address, mask and gateway for your VOIP module. SIP server is IP address of the OfficeRoute. Login and password will be created in the next steps.

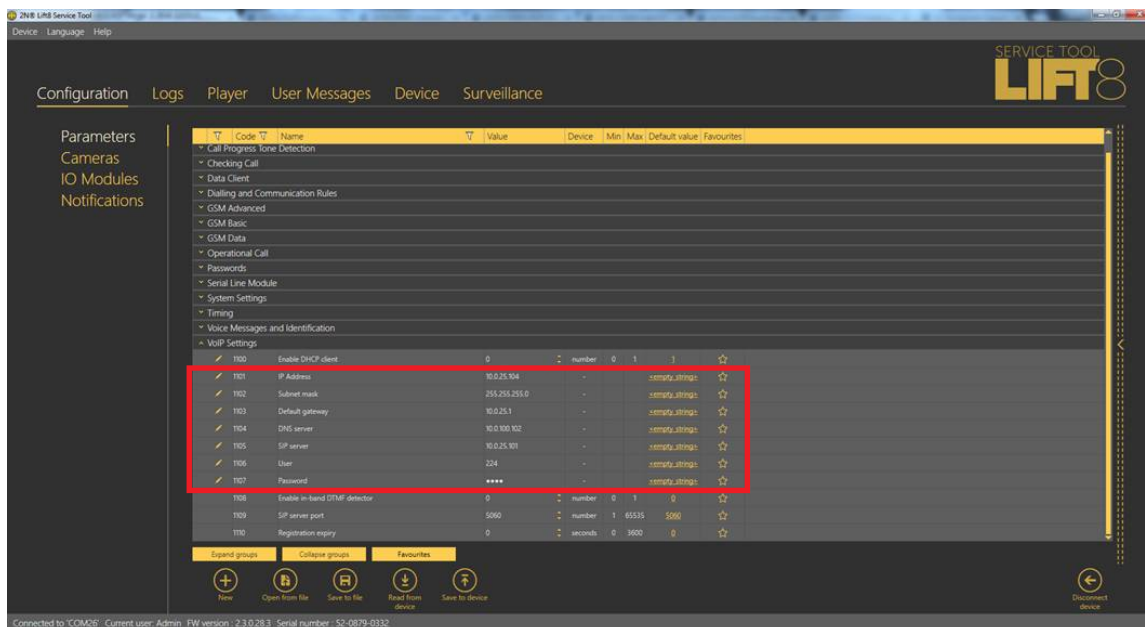

2. Now open web interface of the OfficeRoute and go to section Telephony services->SIP Proxy and click on "Switch SIP Proxy on".

2N OfficeRoute Admin

SK CZ EN




Network


User management


Telephony services


Administration


States & Logs


Messaging

SIP Proxy successfully switched off.

If prefix	Strip	Add	Do action	With parameter			
sip:0	0		connect to LCR	SIP - Internal SIP line	✏	✖	☐
sip:199	0		connect to LCR	SIP - Internal SIP line	✏	✖	☐
else	0		lookup registration		✏		

SIP proxy
» Switch SIP Proxy on


Logout ⓘ +

3. Now go to section User Management->Users and press + button in the low right corner.

Admin

2N OfficeRoute

SK CZ EN




User management


Network


Telephony services


Administration


States & Logs


Messaging

Users


Groups

Ring groups

Users

Name	Group	Language	Line number	Description			
100	SMS	English	100				<input type="checkbox"/>
101	SMS	English	101				<input type="checkbox"/>
102	SMS	English	102				<input type="checkbox"/>
103	SMS	English	103				<input type="checkbox"/>
104	SMS	English	104				<input type="checkbox"/>
Admin	Administrators	English		Administrator			<input type="checkbox"/>
sms1	SMS	English					<input type="checkbox"/>

Logout ⓘ



4. Now create user, fill in username and password (these credentials will be used in the first step). Also fill in the line number, it is recommended to use the same for all the fields. E.g. 224 for password, 224 for username and so on. Once you will finish press save in the low right corner.

TELECOMMUNICATIONS

Network **User management** Telephony services Administration States & Logs Messaging

Add user

User name: 224

New password: ...

Confirm new password: ...

Group: Administrators ▾

Language: English ▾

Default application: User management ▾

Rights: USERS+LINES+LCR USERS LINES LCR SMS

Rights denied: USERS+LINES+LCR USERS LINES LCR SMS

Line number: 224

Description: _____

Mobility Extension

Outgoing ME enabled:

Outgoing ME number: _____

Incoming ME enabled:

Incoming ME number: _____

SMS at no answer enabled:

SMS at no answer number: _____




Voicemail

Voicemail enabled:

PIN: _____

SMS notification number: _____

Logout ⓘ





5. Now you should be able to see the user you just created in the user list.


Admin


2N OfficeRoute


SK CZ EN





Network


User management


Telephony services


Administration
















States & Logs



Messaging



Users

[Groups](#)
[Ring groups](#)

Set user

Name	Group	Language	Line number	Description			
100	SMS	English	100				<input type="checkbox"/>
101	SMS	English	101				<input type="checkbox"/>
102	SMS	English	102				<input type="checkbox"/>
103	SMS	English	103				<input type="checkbox"/>
104	SMS	English	104				<input type="checkbox"/>
224	Administrators	English	224				<input type="checkbox"/>
Admin	Administrators	English		Administrator			<input type="checkbox"/>
sms1	SMS	English					<input type="checkbox"/>

Logout 
Data for user successfully set

- Now you can use credentials of created user in the first step. Then you can check whether the registration was successful or not in the section Telephony services->SIP Proxy->Registrations.

Admin

2N OfficeRoute

SK CZ EN

Network

User management

Telephony services

Administration

States & Logs

Messaging

SIP Proxy successfully switched on.

If prefix	Strip	Add	Do action	With parameter			
sip:0	0		connect to LCR	SIP - Internal SIP line			<input type="checkbox"/>
sip:199	0		connect to LCR	SIP - Internal SIP line			<input type="checkbox"/>
else	0		lookup registration				

SIP proxy

- Switch SIP Proxy off
- Registrations

Logout ⓘ