

AXIS A8105-E – Přímé volání na 2N® Indoor Touch

2N® Indoor Touch podporuje přijmutí hovoru z dveřní stanice AXIS A8105-E. Jsou zde však určitá omezení.




Důležité informace

- Nelze uskutečnit hovor ze zařízení 2N® Indoor Touch zpět do dveřní stanice AXIS.
- Během příchozího hovoru zde není náhled videa.
- 2N® Indoor Touch by měl mít firmware verze 3.5.1 nebo novější.
- Testováno s dveřní stanicí AXIS A8105-E s verzí firmware 1.65.3.2.
- IP adresa zařízení AXIS A8105-E: 10.0.14.50. IP adresa zařízení 2N® Indoor Touch: 10.0.14.55. Jedná se pouze o příklad, nahradte prosím dle požadavků vaší sítě.

Konfigurace odpovídací jednotky 2N® Indoor Touch

- Přejděte do menu dostupném na displeji - sekce 2N IP Mobile - Nastavení a deaktivujte randomizaci SIP portu.

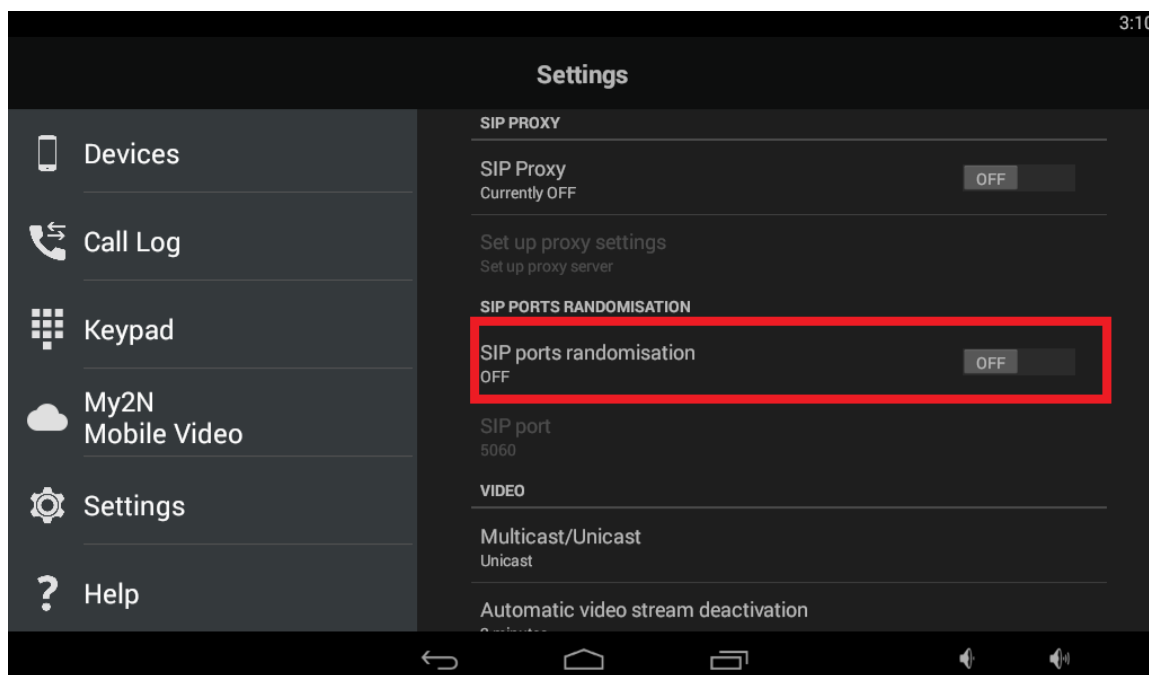

Konfigurace dveřní stanice AXIS A8105-E

- Přejděte do webové správy - sekce VoIP - SIP Settings a aktivujte SIP.

- ▶ Basic Setup
- ▶ Video & Audio
- ▼ VoIP
 - Overview
 - SIP Settings**
 - VMS Settings
 - Account Settings
 - DTMF Settings

SIP Settings

SIP Setup Assistant

Start the setup assistant for easy SIP configuration. Start...

SIP Settings

Enable SIP

Calling timeout (seconds):

- Přejděte do webové správy - sekce Events - Recipients a přidejte SIP adresu zařízení 2N® Indoor Touch jako nového příjemce (Recipient).

- ▶ Basic Setup
- ▶ Video & Audio
- ▶ VoIP
- ▶ Live View Config
- ▶ Detectors
- ▶ Applications
- ▼ Events
 - Action Rules
 - Recipients**
 - Schedules

Recipients

Recipients List			
Name	Type	Address	Upload

Recipient Setup

Name:

Type:

From SIP account:

To SIP address:

Test

Test the connection between the selected SIP account and the specified SIP address. The call will end automatically.

Select SIP account:

- Přejděte do webové správy - sekce Events - Action Rules a vytvořte nové pravidlo (Action Rule) pro volání na 2N® Indoor Touch pomocí volacího tlačítka.

- ▶ Basic Setup
- ▶ Video & Audio
- ▶ VoIP
- ▶ Live View Config
- ▶ Detectors
- ▶ Applications
- ▼ Events
 - Action Rules**
 - Recipients
 - Schedules
 - Recurrences

Action Rules

Action Rule List					
	Name	Trigger	Schedule	Action	Recipient
<input type="checkbox"/>	AUDIO: Calling	Call - State	-	Play Audio Clip	-
<input type="checkbox"/>	AUDIO: Stop on Active call	Call - State	-	Stop Audio Clip	-
<input type="checkbox"/>	AUDIO: Stop on Idle call	Call - State	-	Stop Audio Clip	-
<input type="checkbox"/>	LIGHT: Active call	Call - State	-	Activate Light	-
<input type="checkbox"/>	LIGHT: Calling	Call - State	-	Activate Light	-
<input type="checkbox"/>	LIGHT: Idle	Call - State	-	Activate Light	-
<input type="checkbox"/>	TAMPERING: Shock detected	Detectors - Shock Detection	-	Output Port	-
<input type="checkbox"/>	TAMPERING: Tilt detected	Detectors - Tilt Detection	-	Output Port	-

Action Rule Setup ?

General

Enable rule

Name:

Condition

Trigger: Start condition only

Active: Yes No

Schedule:

Additional conditions

Wait at least before re-running the rule (max 23:59:59)

Actions

Type:


Recipient:

- Přejděte do webové správy - sekce VoIP - DTMF Settings a přidejte sekvenci DTMF pro odemykání dveří pomocí zařízení 2N® Indoor Touch.

- ▶ Basic Setup
- ▶ Video & Audio
- ▶ VoIP
 - Overview
 - SIP Settings
 - VMS Settings
 - Account Settings
 - DTMF Settings**
- ▶ Live View Config
- ▶ Detectors

DTMF Settings ?

DTMF Configuration for SIP Accounts

▼ 100 

DTMF using SIP INFO (RFC2976)
 DTMF using RTP (RFC2833)

Associated DTMF Sequences

Name	Sequence

Modify DTMF Configuration ?

SIP Account: 100

DTMF using SIP INFO (RFC2976)

DTMF using RTP (RFC2833)

DTMF Sequences

Name	Sequence
<input checked="" type="checkbox"/> Unlock	00

Add...

Modify...

Remove

- Přejděte do webové správy - sekce Events - Action Rules a vytvořte nové pravidlo (Action Rule) pro otevření dveří pomocí sekvence DTMF během hovoru.

- ▶ Basic Setup
- ▶ Video & Audio
- ▶ VoIP
- ▶ Live View Config
- ▶ Detectors
- ▶ Applications
- ▼ Events
 - Action Rules**
 - Recipients
 - Schedules
 - Recurrences

Action Rules ?

Name	Trigger	Schedule	Action	Recipient
<input type="checkbox"/> AUDIO: Calling	Call - State	-	Play Audio Clip	-
<input type="checkbox"/> AUDIO: Stop on Active call	Call - State	-	Stop Audio Clip	-
<input type="checkbox"/> AUDIO: Stop on Idle call	Call - State	-	Stop Audio Clip	-
<input type="checkbox"/> LIGHT: Active call	Call - State	-	Activate Light	-
<input type="checkbox"/> LIGHT: Calling	Call - State	-	Activate Light	-
<input type="checkbox"/> LIGHT: Idle	Call - State	-	Activate Light	-
<input type="checkbox"/> TAMPERING: Shock detected	Detectors - Shock Detection	-	Output Port	-
<input type="checkbox"/> TAMPERING: Tilt detected	Detectors - Tilt Detection	-	Output Port	-

Action Rule Setup



General

Enable rule

Name:

Condition

Trigger:

Start condition only

Schedule:

Additional conditions

Wait at least before re-running the rule (max 23:59:59)

Actions

Type:

Port:

Set state: Active Inactive

Duration

Go to opposite state when the rule is no longer active

Go to opposite state after