


Firmware update - How to do firmware update on 2N® IP Intercoms

In the web interface of the intercom, go to System>Maintenance and locate the "Upgrade Device Firmware" section.

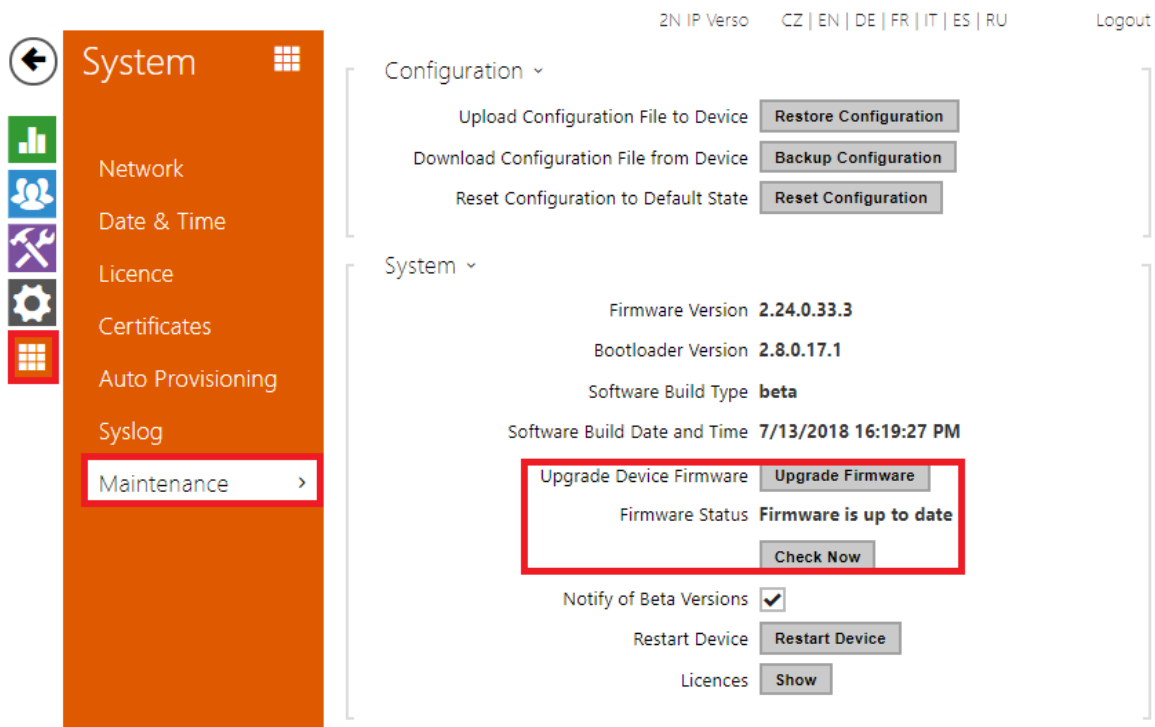

The screenshot shows the web interface of a 2N IP Intercom. At the top, there is a language selection menu with options: CZ | EN | DE | FR | IT | ES | RU, and a Logout button. The main content area is divided into two sections: Configuration and System. The Configuration section includes buttons for 'Restore Configuration', 'Backup Configuration', and 'Reset Configuration'. The System section displays the following information: Firmware Version 2.24.0.33.3, Bootloader Version 2.8.0.17.1, Software Build Type beta, and Software Build Date and Time 7/13/2018 16:19:27 PM. A red box highlights the 'Upgrade Device Firmware' button, the 'Upgrade Firmware' button, the 'Firmware Status' field showing 'Firmware is up to date', and the 'Check Now' button. Below this, there is a 'Notify of Beta Versions' checkbox which is checked, a 'Restart Device' button, and a 'Licences Show' button. On the left side, there is a navigation menu with icons for Network, Date & Time, Licence, Certificates, Auto Provisioning, Syslog, and Maintenance (which is highlighted with a red box).

- Upgrade firmware - manually update your intercom firmware. Press the button to display a dialogue window for you to select and upload the firmware file to the intercom. The intercom will automatically get restarted and new FW will then be available. The whole updating process takes less than one minute. Refer to www.2n.cz for the latest FW version for your intercom. FW update does not affect configuration as the intercom checks the FW file to prevent upload of a wrong or corrupted file.
- Check now - automatically find and update your intercom firmware by checking online whether a new firmware version is available. If there is, then it allows you to download the new FW version and an automatic device update will follow.
- More product information:
 - Door & Security Intercoms (Official Website 2N)